



FERROTEC CONFIDENTIAL

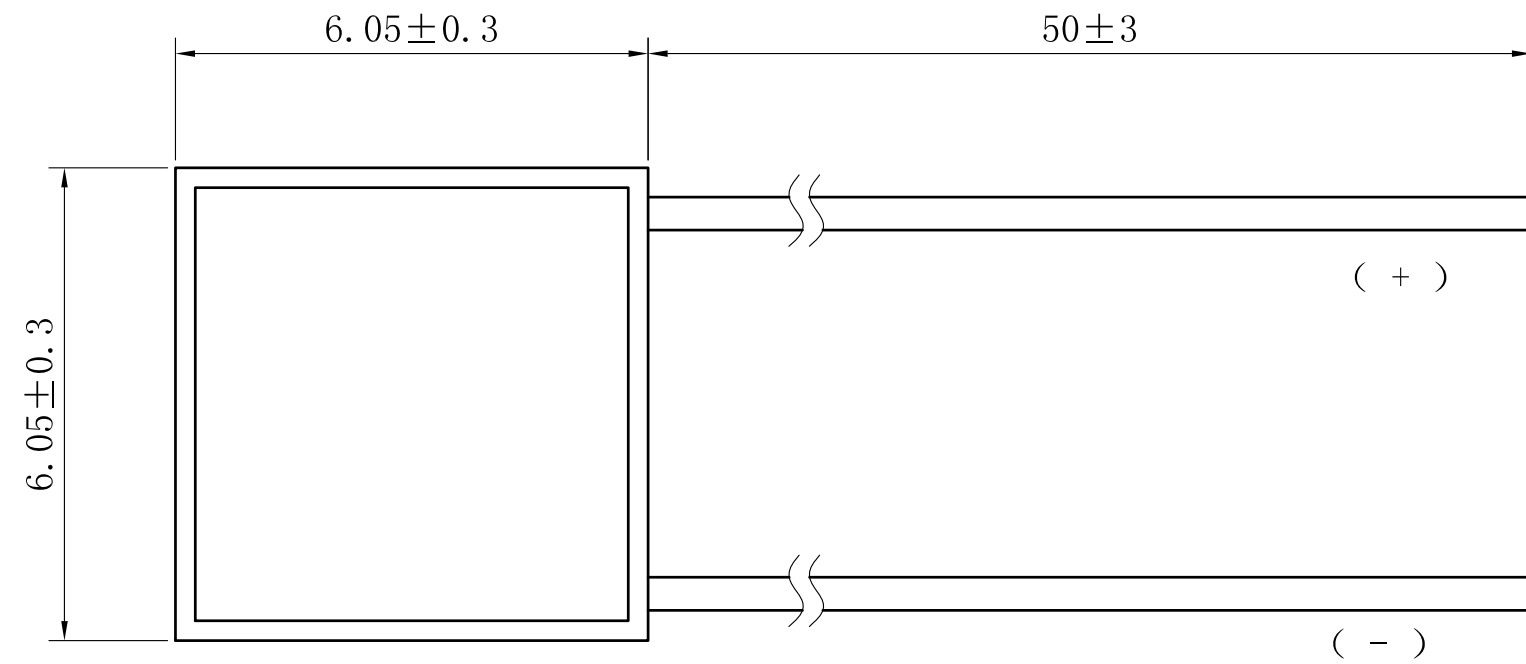

- 1). The resistance of the module shall be within 1.310 to 1.594 ohms at an ambient temperature of 25 degrees Celsius.
- 2). Material of lead wires: #30 AWG Tinned Single strand.
- 3). The cold and hot sides of module shall be gold plated.

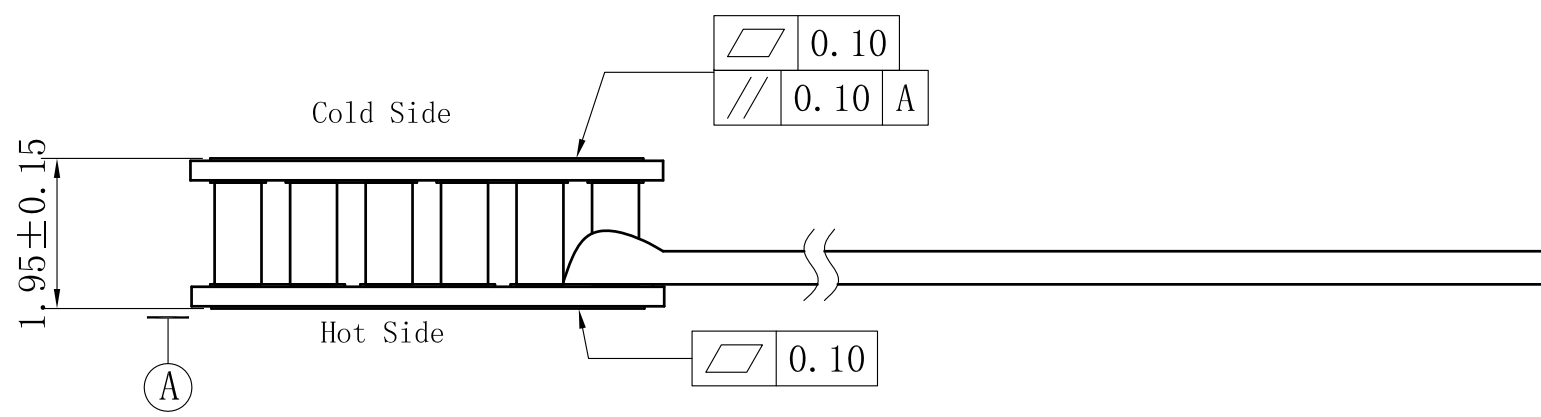

ROHS COMPLIANCE

| Item | Value | Test Conditions |
|-------------------|-------|---|
| I _{max} | 1.2A | Q _c =0, DT=DT _{max} , Th=50°C |
| V _{max} | 2.5V | Q _c =0, I=I _{max} , Th=50°C |
| DT _{max} | 80°C | Q _c =0, I=I _{max} , Th=50°C |
| Q _{cmax} | 1.6W | I=I _{max} , DT=0, Th=50°C |
| Th _{max} | 200°C | Momentary |

Ferrotec Corporation
 (Zhijiang Factory)
 668# Binkang Road, Hangzhou Hi-tech
 Garden, Zhejiang Province, P.R.China

| General Dimension Tolerance | | | | PLs | Date Modifying | Summary Of Modification | By | Designed | Finished Mark | Title | Proj. |
|-----------------------------|---------|---------|---------|-----|----------------|-------------------------|----|--------------|---------------|-------------------|---------------------------|
| Process | Cutting | | Forging | ▲ | | | | Yufeng Jiang | 2014.2.7 | 20023/017/012M | 3 Angle |
| | Common | Special | Common | | | | | Checked | | | |
| Size Range | Common | Special | Common | ▲ | | | | Yongqin Wu | 2014.2.7 | Drawing Number | 1 1 |
| less than 6 | ±0.1 | ±0.15 | ±0.5 | ▲ | | | | Approved | | T1402-0700 | |
| 6 up to 30 | ±0.2 | | | ▲ | | | | FTH | | P/N | Scale: Do Not Scale |
| 30 up to 120 | ±0.3 | ±0.2 | ±0.7 | ▲ | | | | Approved | | | |
| 120 up to 315 | ±0.5 | ±0.25 | ±1.0 | ▲ | | | | FT | | Raw Material Size | |
| 315 up to 1000 | ±0.8 | ±0.4 | ±1.5 | ▲ | | | | FTA | | | Raw Material Weight |
| 1000 up to 2000 | ±1.2 | ±0.6 | ±2.0 | ▲ | | | | Approved | | | |